


LED Linear High Bay


50W / 60W (300mm)



Optional accessories

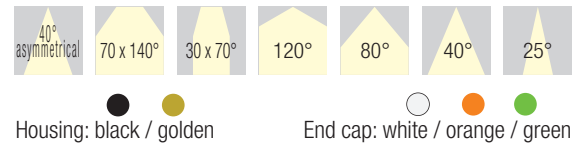

Dimensions (mm)

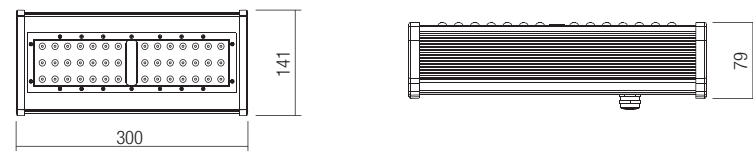


Product Features

- Patented product.
- Innovative optical design and excellent heat dissipation, up to 130 lm/W.
- 0-10V dimmable, emergency and occupancy sensing versions are available.
- Beam angles: 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical.
- LED lamps: Nichia, Osram, Philips, or Samsung, LM-80 approved.
- LED drivers: Meanwell or MOSO.
- Sand blasted and anodized finish treatment, corrosion-resistant.
- Lengths: 300mm - 60W, 600mm - 100W, 900mm - 150W, 1200mm - 200W, 1500mm - 320W.
- IP66 and IK08 rated.
- Warranty: 5 years.
- Mounting: U shaped bracket, Z shaped bracket, Suspended, Graduated bracket (15°increment), wall mounted.
- Certifications: CB, ETL, TUV, FCC, CE, IK08, SAA.

Applications



Product Highlights

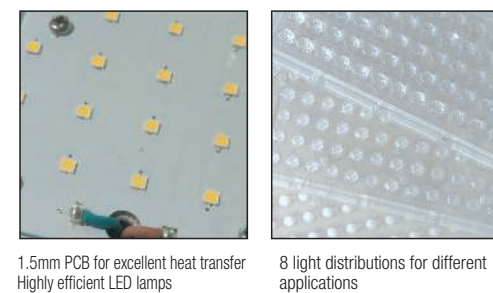


1.5mm PCB for excellent heat transfer Highly efficient LED lamps

8 light distributions for different applications

Specifications


Product model	JH-LI50W-01B	JH-LI60W-01B
Input power	50W	60W
Light output	6,500 lm	7,800 lm
Efficacy	130 lm/W	130 lm/W
LED lamp	3030	3030
CCT	3000K, 4000K, 5000K, 6000K	3000K, 4000K, 5000K, 6000K
CRI	80	80
Beam angle	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical
Optical cover	PC lens (Bayer)	PC lens (Bayer)
LED driver	Meanwell	Meanwell
Input voltage	100-305V AC, 50/60Hz	100-305V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP66	IP66
Lifetime	50,000 hrs	50,000 hrs
Mounting	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted

Photometrics

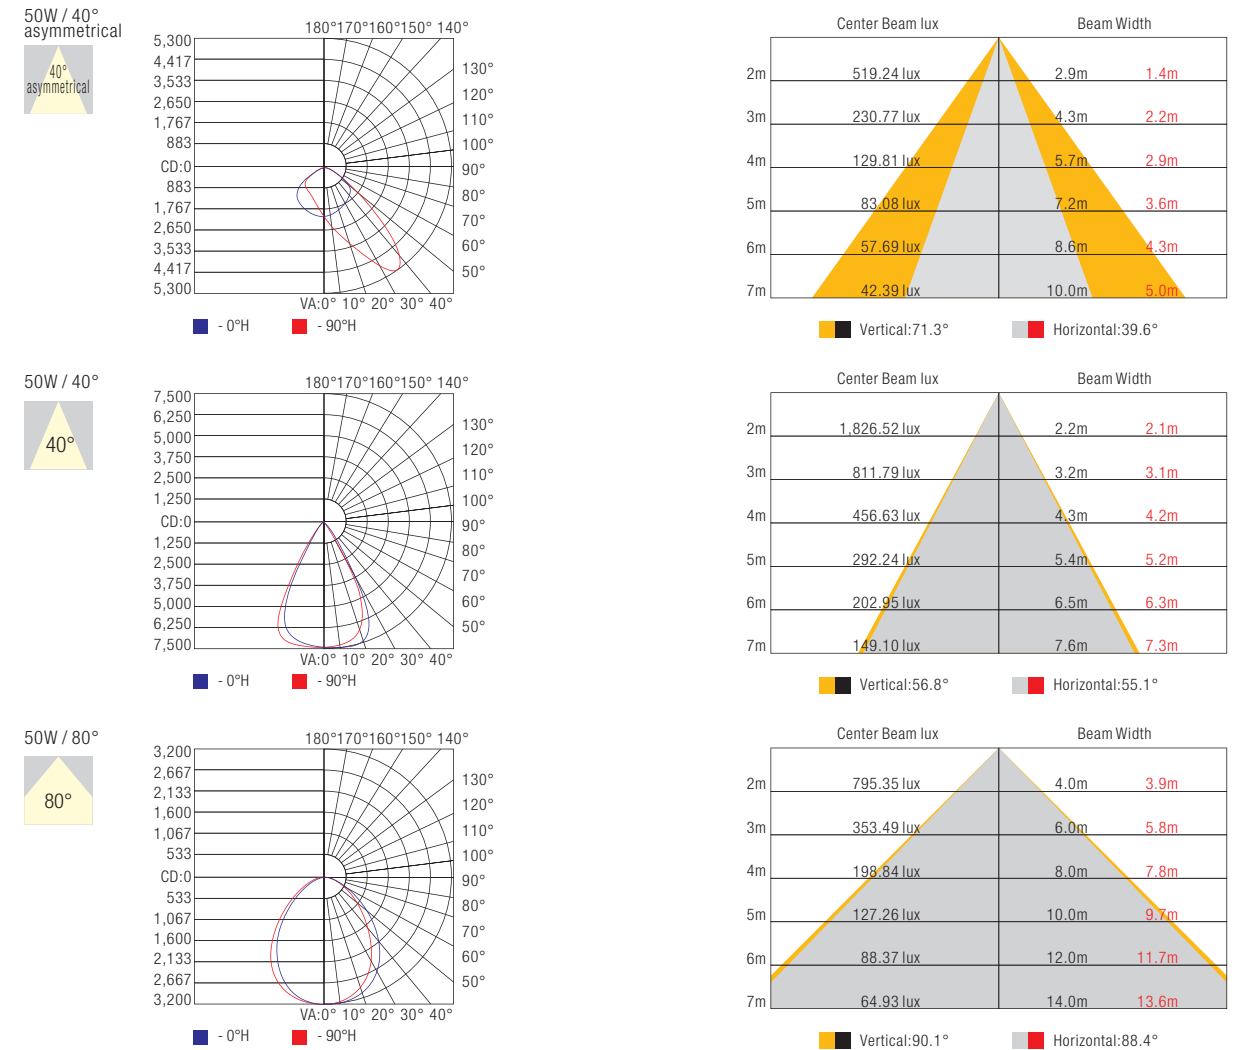


LED Linear High Bay

100W / 120W / 150W (600mm)




Dimensions (mm)

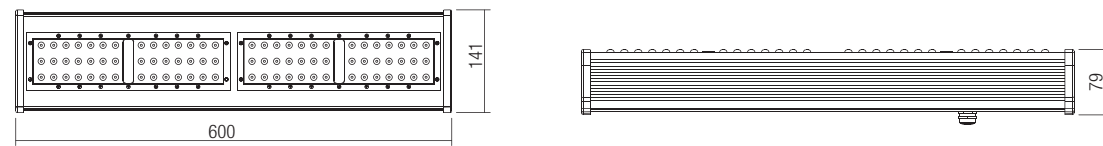

Specifications

Product model	JH-LI100W-01	JH-LI120W-01	JH-LI150W-01B
Input power	100W	120W	150W
Light output	13,000 lm	15,600 lm	18,750 lm
Efficacy	130 lm/W	130 lm/W	125 lm/W
LED lamp	3030	3030	3030
CCT	3000K, 4000K, 5000K, 6000K	3000K, 4000K, 5000K, 6000K	3000K, 4000K, 5000K, 6000K
CRI	80	80	80
Beam angle	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical
Optical cover	PC lens (Bayer)	PC lens (Bayer)	PC lens (Bayer)
LED driver	Meanwell	Meanwell	Meanwell
Input voltage	100-305V AC, 50/60Hz	100-305V AC, 50/60Hz	100-305V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing	0-10V, DALI, Emergency, Occupancy sensing	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP66	IP66	IP66
Lifetime	50,000 hrs	50,000 hrs	50,000 hrs
Mounting	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted

Photometrics

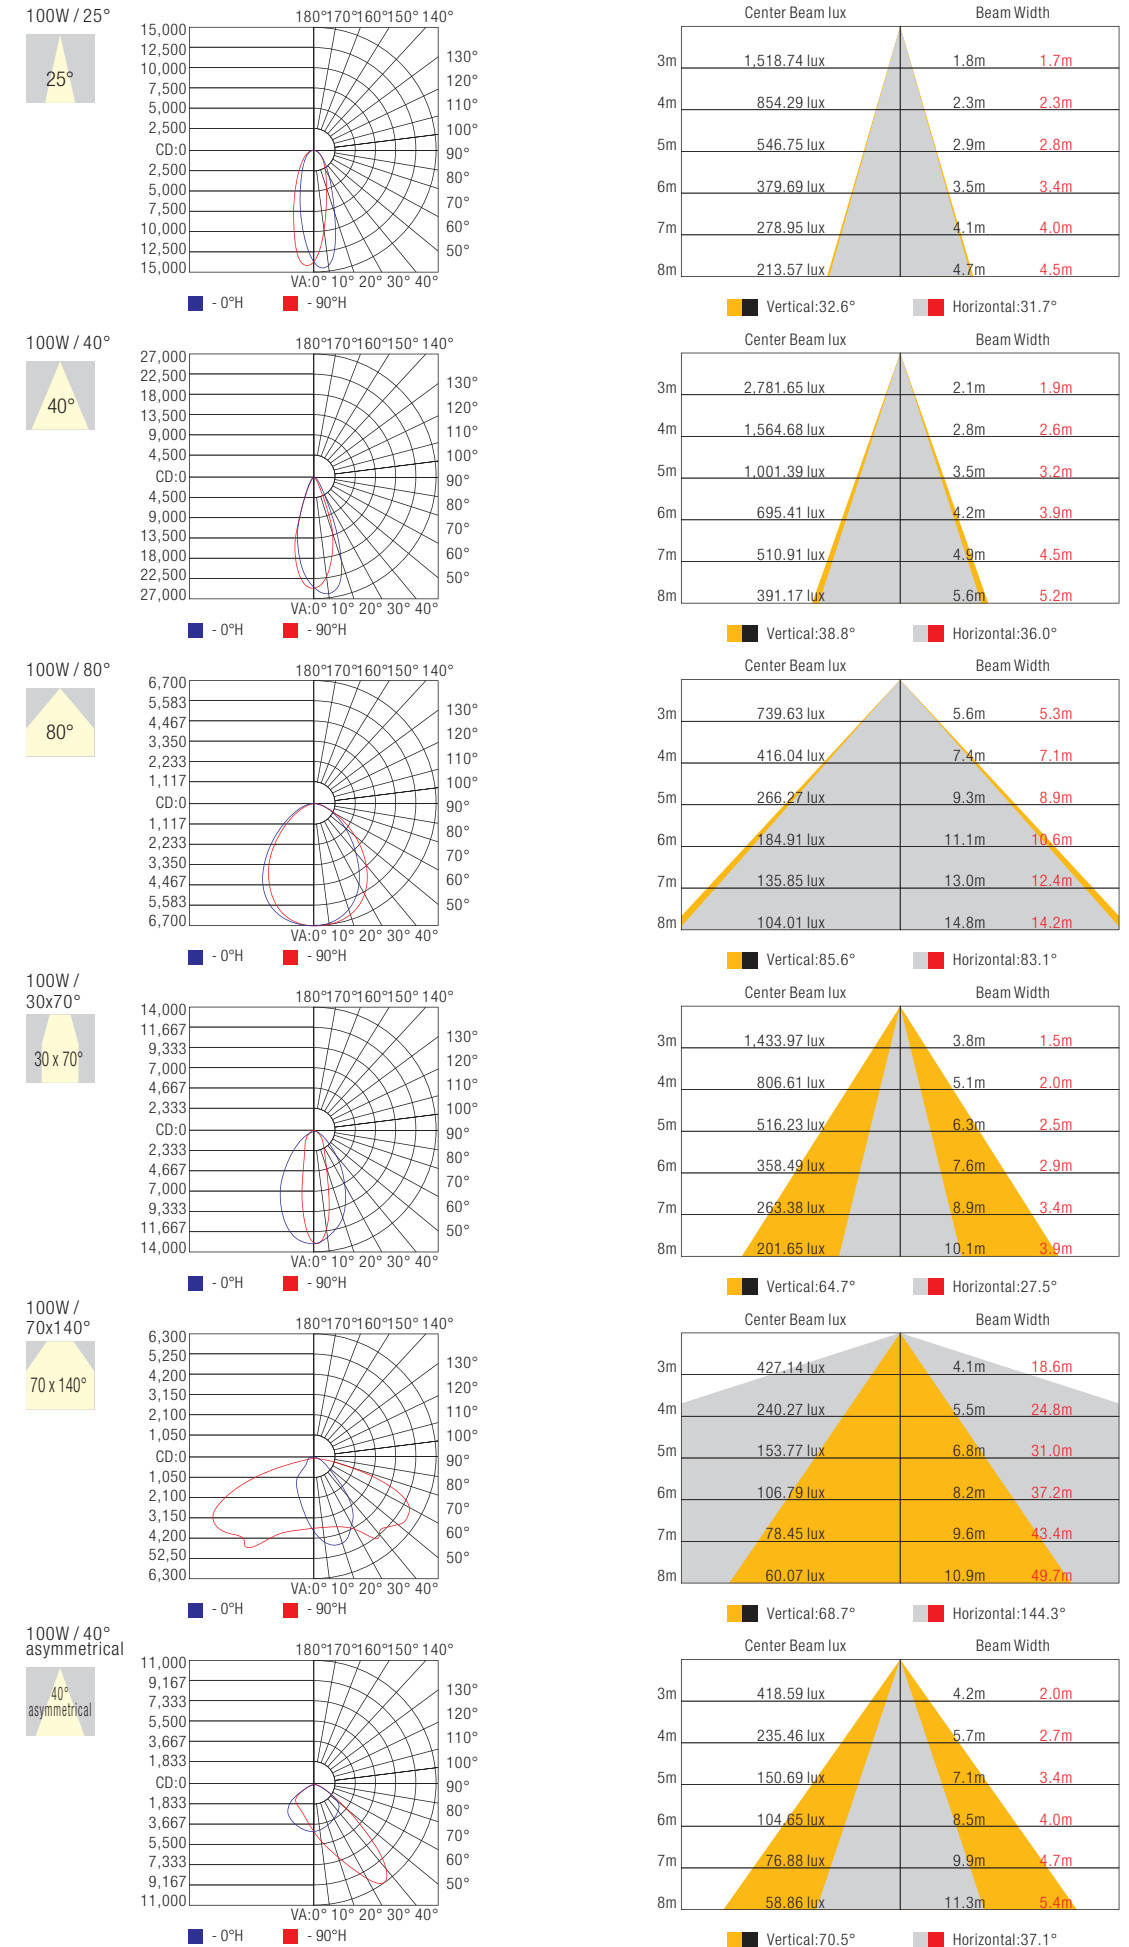


LED Linear High Bay

150W / 200W (900mm)













Dimensions (mm)

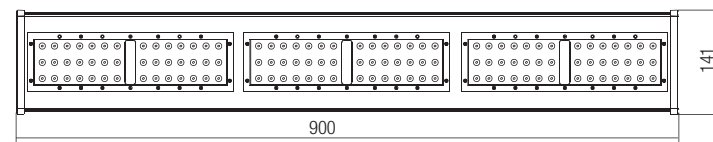

Specifications


Product model	JH-LI150W-01	JH-LI200W-01B
Input power	150W	200W
Light output	19,500 lm	25,000 lm
Efficacy	130 lm/W	125 lm/W
LED lamp	3030	3030
CCT	3000K, 4000K, 5000K, 6000K	3000K, 4000K, 5000K, 6000K
CRI	80	80
Beam angle	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical
Optical cover	PC lens (Bayer)	PC lens (Bayer)
LED driver	Meanwell	Meanwell
Input voltage	100-305V AC, 50/60Hz	100-305V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP66	IP66
Lifetime	50,000 hrs	50,000 hrs
Mounting	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted

Photometrics

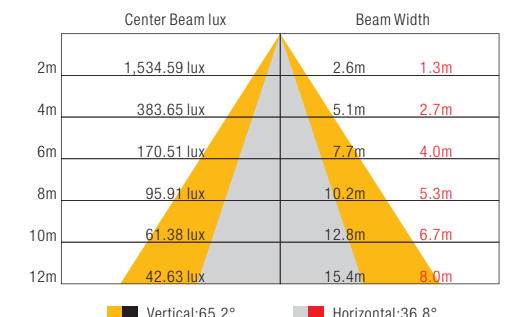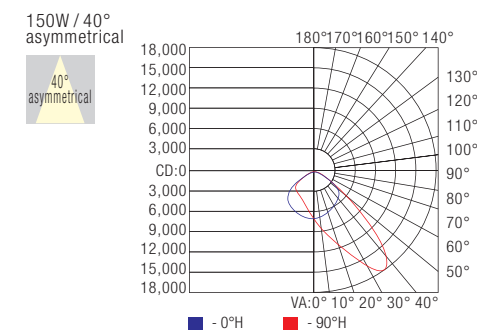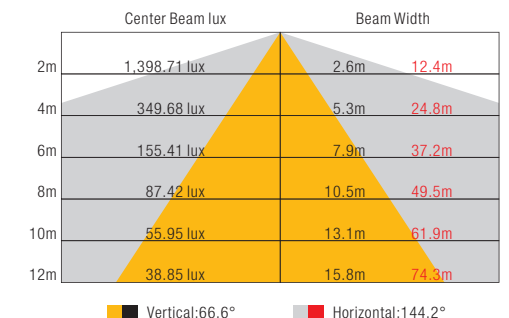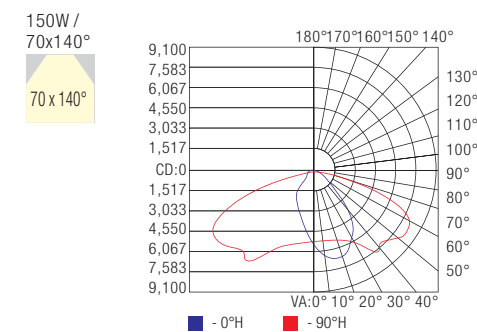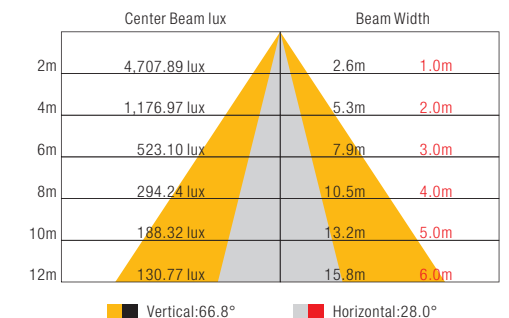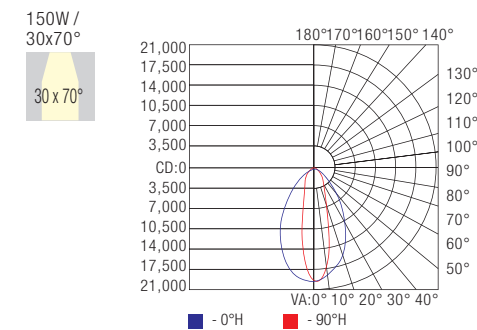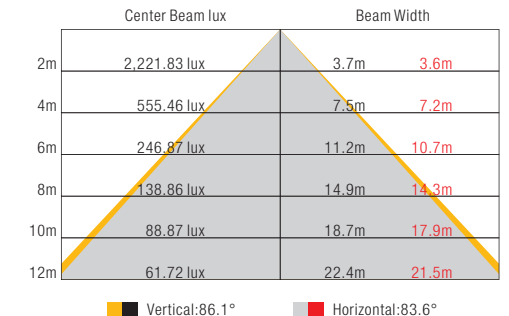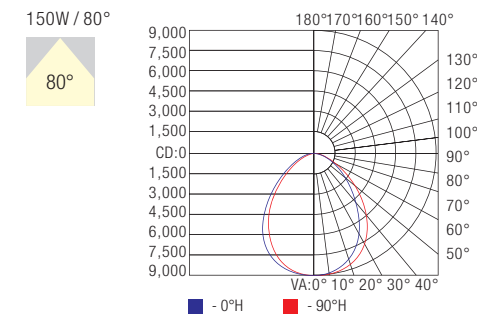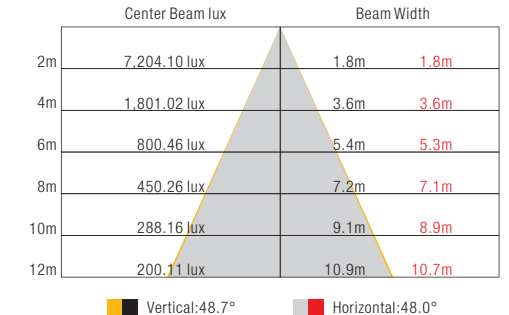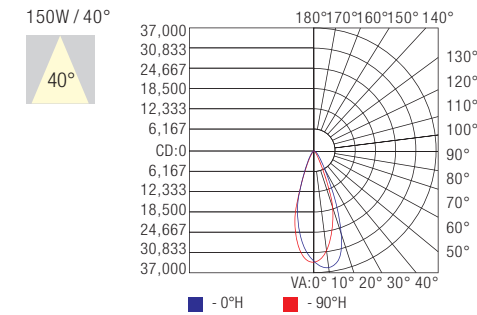


LED Linear High Bay

200W / 240W (1200mm)

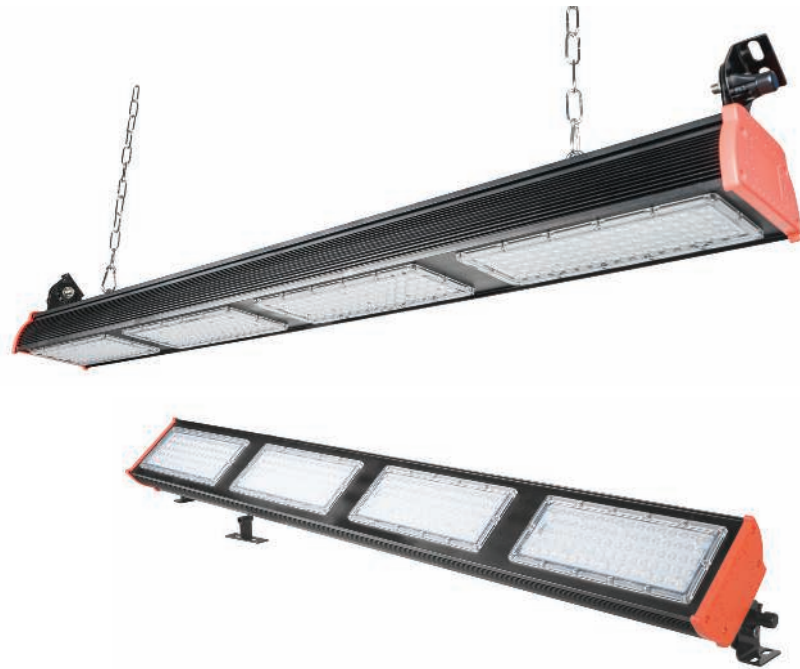


Dimensions (mm)

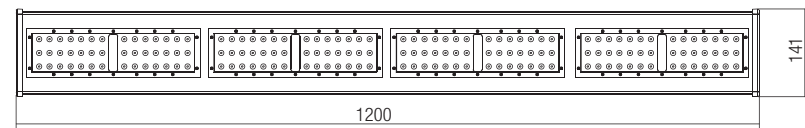


Specifications

Product model	JH-LI200W-01	JH-LI240W-01B
Input power	200W	240W
Light output	26,000 lm	30,000 lm
Efficacy	130 lm/W	125 lm/W
LED lamp	3030	3030
CCT	3000K, 4000K, 5000K, 6000K	3000K, 4000K, 5000K, 6000K
CRI	80	80
Beam angle	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical
Optical cover	PC lens (Bayer)	PC lens (Bayer)
LED driver	Meanwell	Meanwell
Input voltage	100-305V AC, 50/60Hz	100-305V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP66	IP66
Lifetime	50,000 hrs	50,000 hrs
Mounting	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted


Photometrics

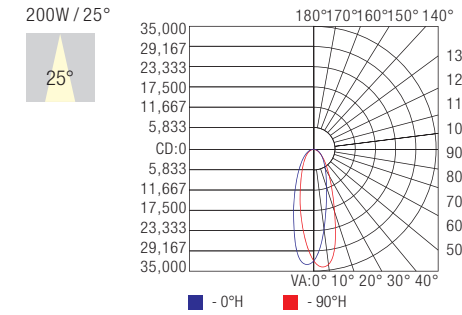


Center Beam lux	Beam Width
4m: 1,881.03 lux	2.0m
6m: 836.01 lux	3.0m
8m: 470.26 lux	3.9m
10m: 300.96 lux	4.9m
12m: 209.00 lux	5.9m
14m: 153.55 lux	6.9m

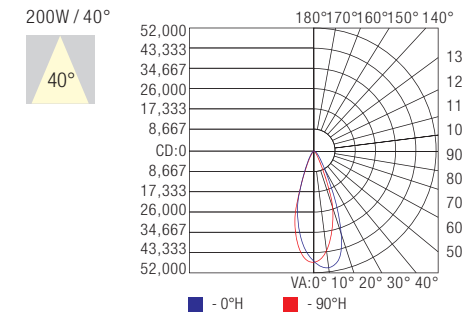


Center Beam lux	Beam Width
4m: 3,025.65 lux	2.9m
6m: 1,344.73 lux	4.3m
8m: 756.41 lux	5.8m
10m: 484.10 lux	7.2m
12m: 336.18 lux	8.7m
14m: 246.99 lux	10.1m

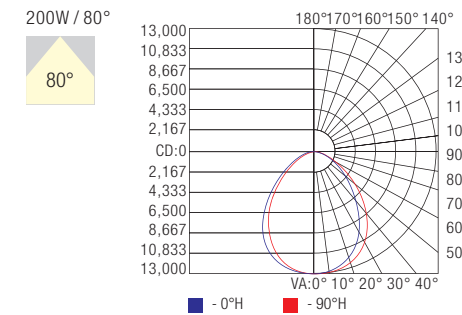


Center Beam lux	Beam Width
4m: 784.11 lux	7.9m
6m: 348.50 lux	11.9m
8m: 196.03 lux	15.9m
10m: 125.46 lux	19.9m
12m: 87.12 lux	23.8m
14m: 64.01 lux	27.8m

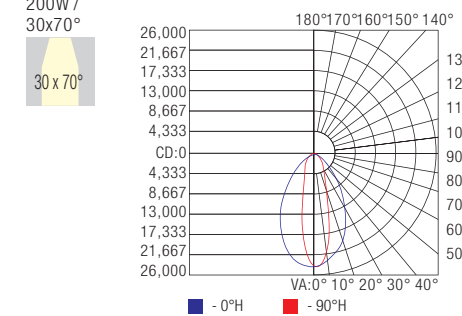

Center Beam lux	Beam Width
4m: 1,527.36 lux	5.2m
6m: 678.83 lux	7.7m
8m: 381.84 lux	10.3m
10m: 244.38 lux	12.9m
12m: 169.71 lux	15.5m
14m: 124.68 lux	18.0m

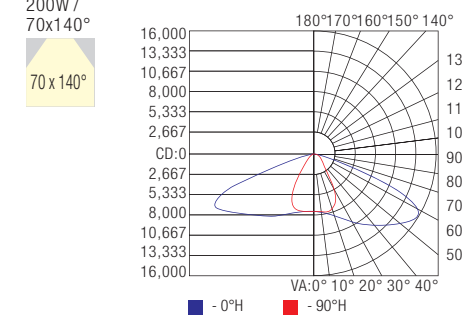

Center Beam lux	Beam Width
4m: 479.59 lux	4.4m
6m: 213.15 lux	6.6m
8m: 119.90 lux	8.7m
10m: 76.73 lux	10.9m
12m: 53.29 lux	13.1m
14m: 39.15 lux	15.3m

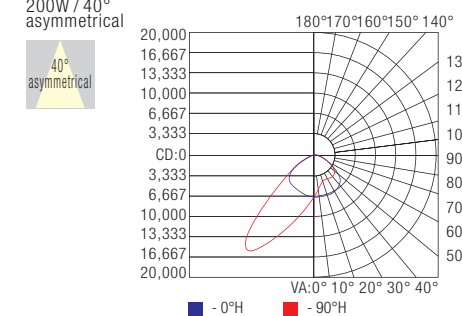


Center Beam lux	Beam Width
4m: 423.67 lux	7.5m
6m: 188.30 lux	11.3m
8m: 105.92 lux	15.1m
10m: 67.79 lux	18.8m
12m: 47.07 lux	22.6m
14m: 34.59 lux	26.4m

LED Linear High Bay

240W / 300W (1500mm)



Dimensions (mm)

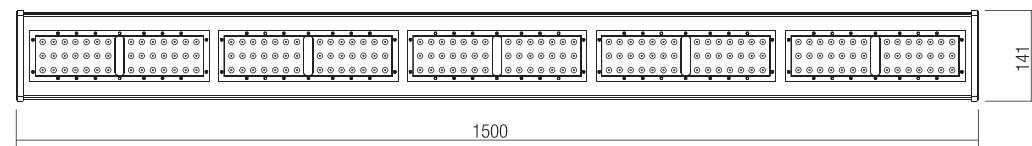

Specifications

Product model	JH-LI240W-01	JH-LI300W-01B
Input power	240W	300W
Light output	31,200 lm	37,500 lm
Efficacy	130 lm/W	125 lm/W
LED lamp	3030	3030
CCT	3000K, 4000K, 5000K, 6000K	3000K, 4000K, 5000K, 6000K
CRI	80	80
Beam angle	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical	25°, 40°, 80°, 120°, 30x70°, 70x140°, 40°asymmetrical
Optical cover	PC lens (Bayer)	PC lens (Bayer)
LED driver	Meanwell	Meanwell
Input voltage	100-305V AC, 50/60Hz	100-305V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP66	IP66
Lifetime	50,000 hrs	50,000 hrs
Mounting	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted

Photometrics

